

USER + ASSEMBLY GUIDE

**PROFESSIONAL
ROOF ACCESS LADDER**

LFI
PRo

LFI
○


**THIS ASSEMBLY
GUIDE IS INTENDED
TO PROVIDE YOU
WITH STEP-BY-STEP
INSTRUCTIONS ON
HOW TO ASSEMBLE
YOUR P_{Ro} ROOF
LADDER WITH EASE
AND SAFETY.**

You should read and understand all notes and diagrams, before commencing assembly. Personnel should be qualified or competent to assemble the P_{Ro} Roof Ladder. Remember to do a risk assessment of the work to be carried out prior to commencing.

This roof ladder shall only be used according to this manual without any modification.

CONTENTS	PAGE
<u>Identifying Components</u>	<u>3</u>
<u>Ridge Hook Assembly</u>	<u>4</u>
<u>Bearer Bar Assembly</u>	<u>7</u>

IDENTIFYING COMPONENTS

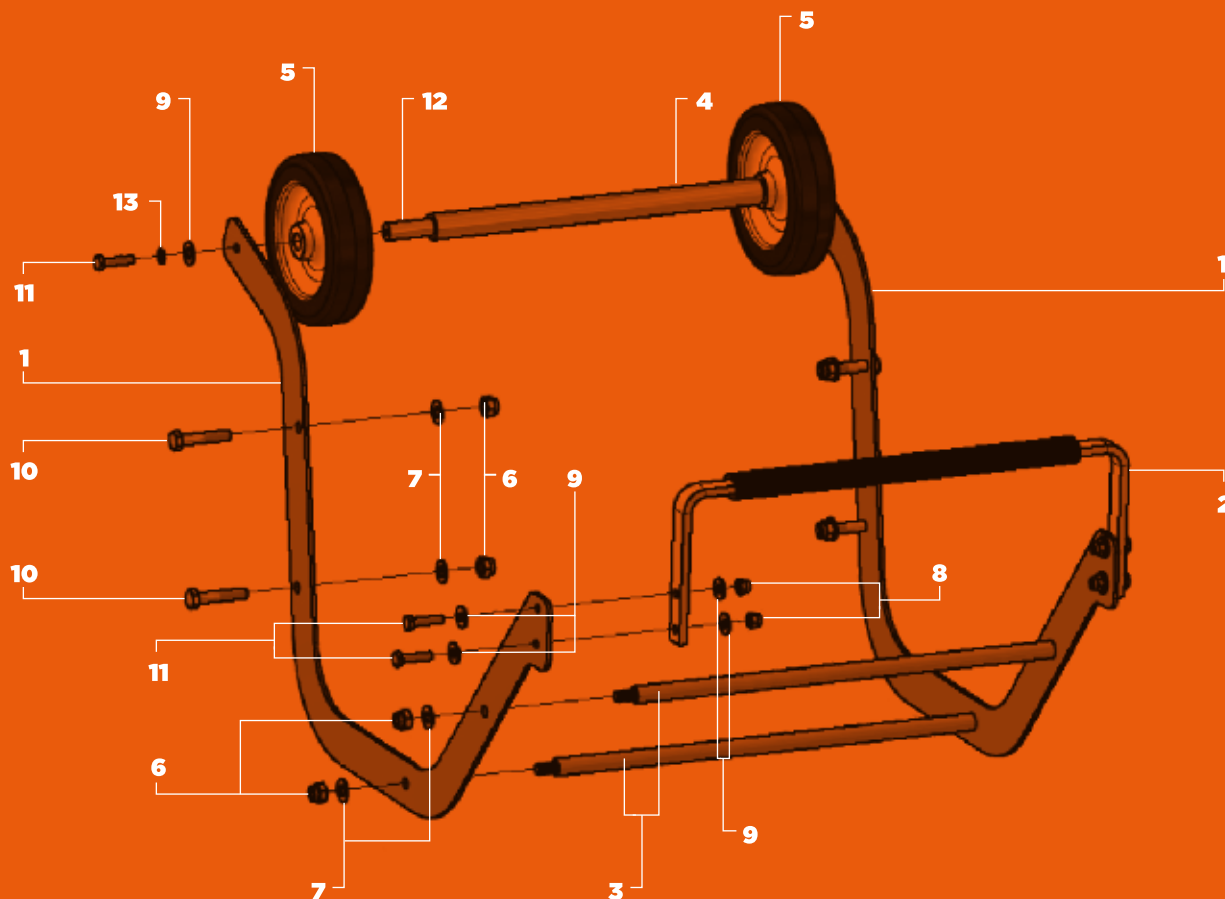

PRo ROOF LADDER COMPONENTS

Item	Description	Quantity
1	Ridge Hook	2
2	Ridge Bearer	1
3	Spreader Bar	2
4	Wheel Spacer	1
5	Wheel	2
6	M8 Nyloc Nut	8
7	M8 Washer	10
8	M6 Nyloc Nut	4
9	M6 Washer	8
10	M8 x 50 Bolt	4
11	M6 x 25 Bolt	6
12	Wheel Axle	1
13	Star Washer	2

RIDGE HOOK ASSEMBLY PROCEDURE



TOOLS REQUIRED

13mm spanner and a 10mm spanner

1.0

STEP


Position one ridge hook (Item 1) next to the ladder and align holes 'A' with those on the ladder.

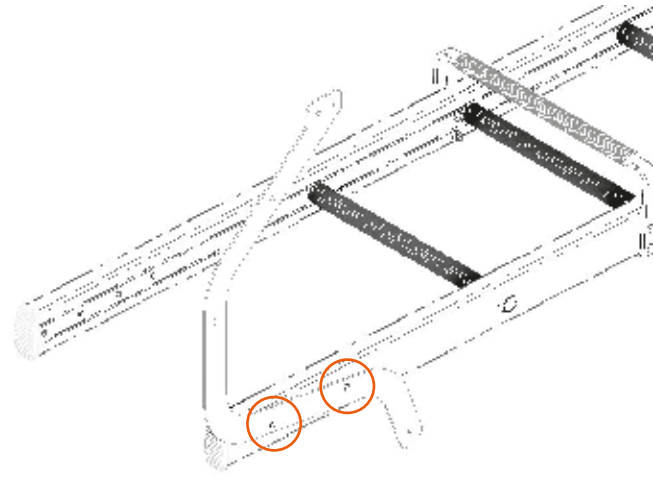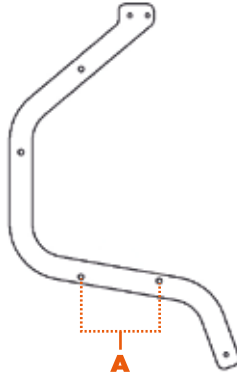

2.0

STEP

Insert 2x M8 x 50 bolts (Item 10) through the hook and ladder and use the M8 washer (Item 7) and M8 nut (Item 6) to fix in place. Do not over tighten.


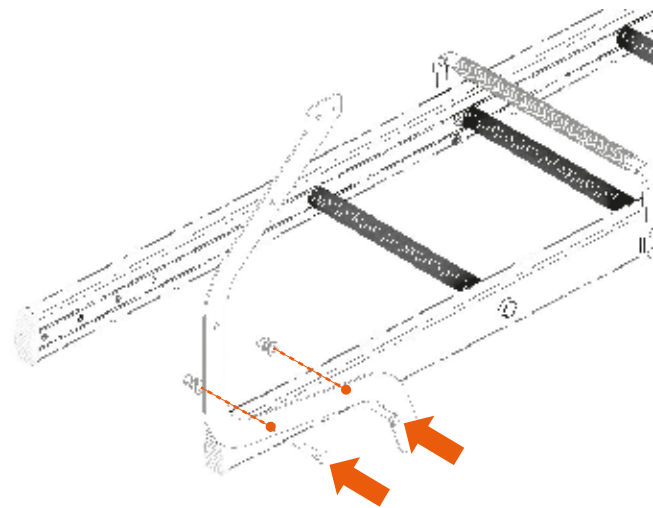


3.0

STEP

Insert the two spreader bars (Item 3) into holes 'B'.

3.1
Use two M8 washers (Item 7) and M8 Nuts (Item 6) to loosely secure spreader bars (Item 3) in place.



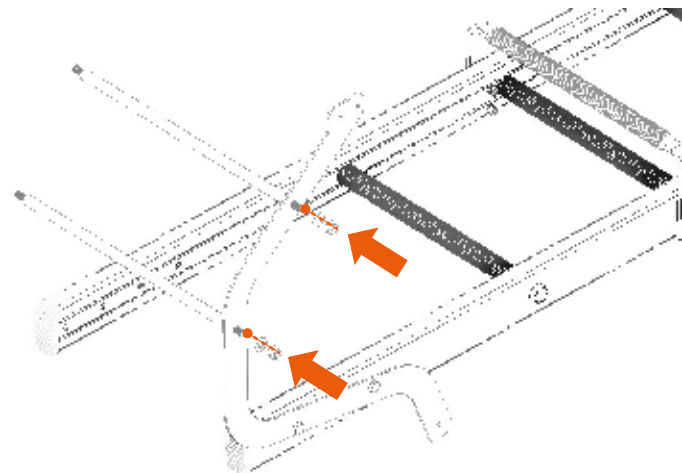
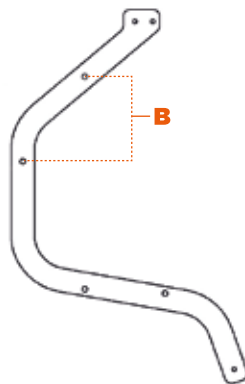


4.0 STEP

Position the second ridge hook (Item 1) next to the ladder and align holes 'A' with those on the ladder.


4.1
Line up and insert the spreader bars with holes 'B'.

4.2
Insert 2x M8 x 50 bolts (Item 10) through the hook (Item 1) and ladder and use the M8 washer (Item 7) and M8 nut (Item 6) to fix in place. Do not over tighten.

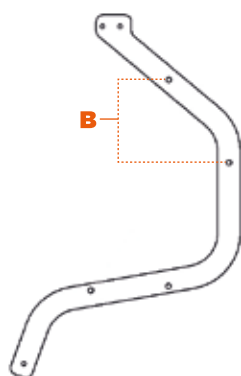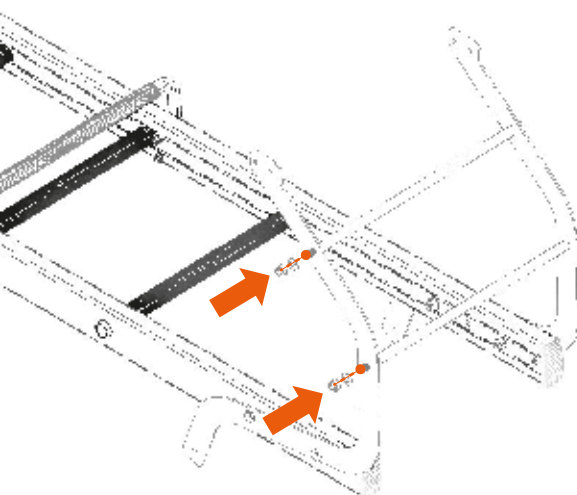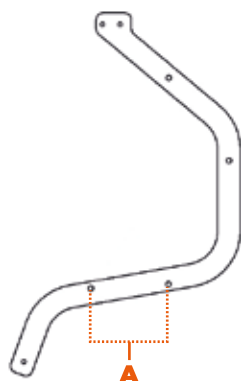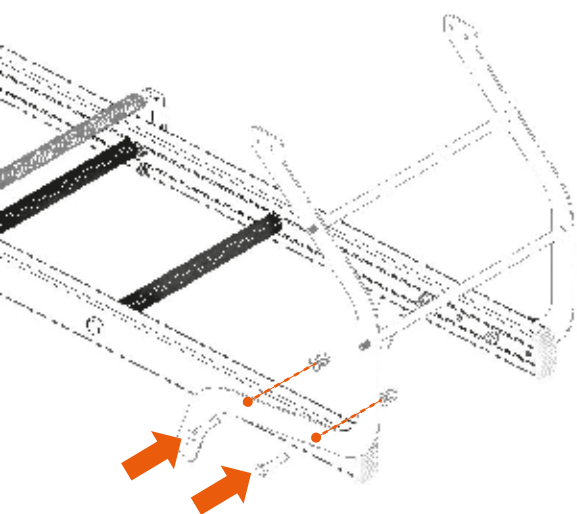


5.0 STEP

Use two M8 washers (Item 7) and M8 Nuts (Item 6) to secure spreader bars (Item 3) in place and fully tighten both ends.

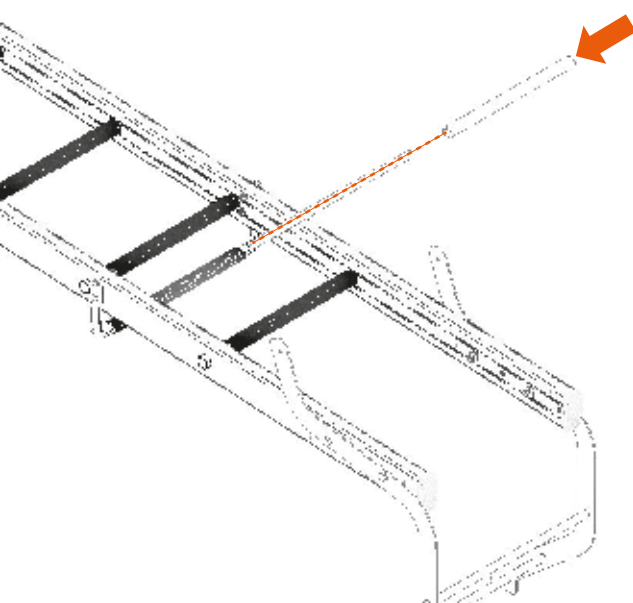

6.0 STEP



Slide the two wheels (Item 5) with the spacer (Item 4) into the wheel axle (Item 12).

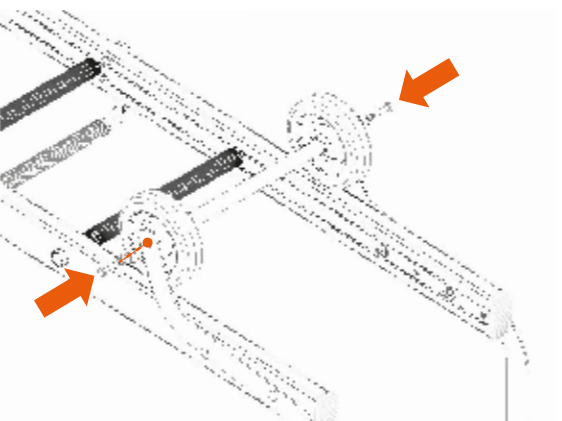

7.0 STEP

Line one end of the wheel axle (Item 12) with hole 'C'.


7.1
Secure in place with M6 x 25 bolt (Item 11), star washer (Item 13) and M6 washer (Item 9) at both ends.

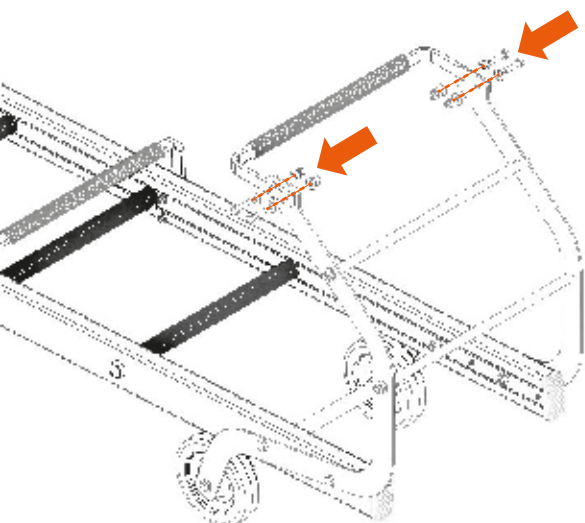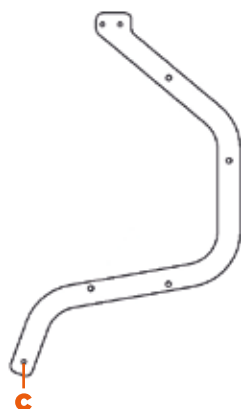

8.0 STEP

Line up ridge bearer (Item 2) on the outside of the ridge hooks (Item 1) with holes 'D'.

8.1
Secure in place with M6 x 25 bolt (Item 11) an M6 washer (Item 9) on both sides and an M6 nut (Item 8).

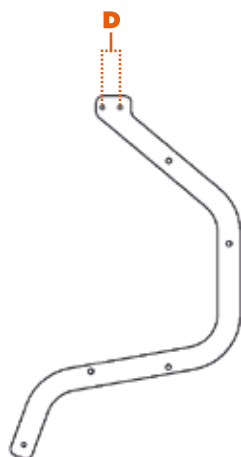

**VIDEO GUIDE
AVAILABLE
SCAN ME
TO WATCH**



BEARER BAR ASSEMBLY PROCEDURE

Single section ladders have 4-6 bearers all the same.


Double section ladders have 3-5 bearers for the lower part, and 1 deeper one for the upper part.

STEP 1.0

Line up the bearer holes with the ladder holes.

STEP 2.0

Secure in place with 4x M6 x 40 bolt, an M6 washer and an M6 nut.

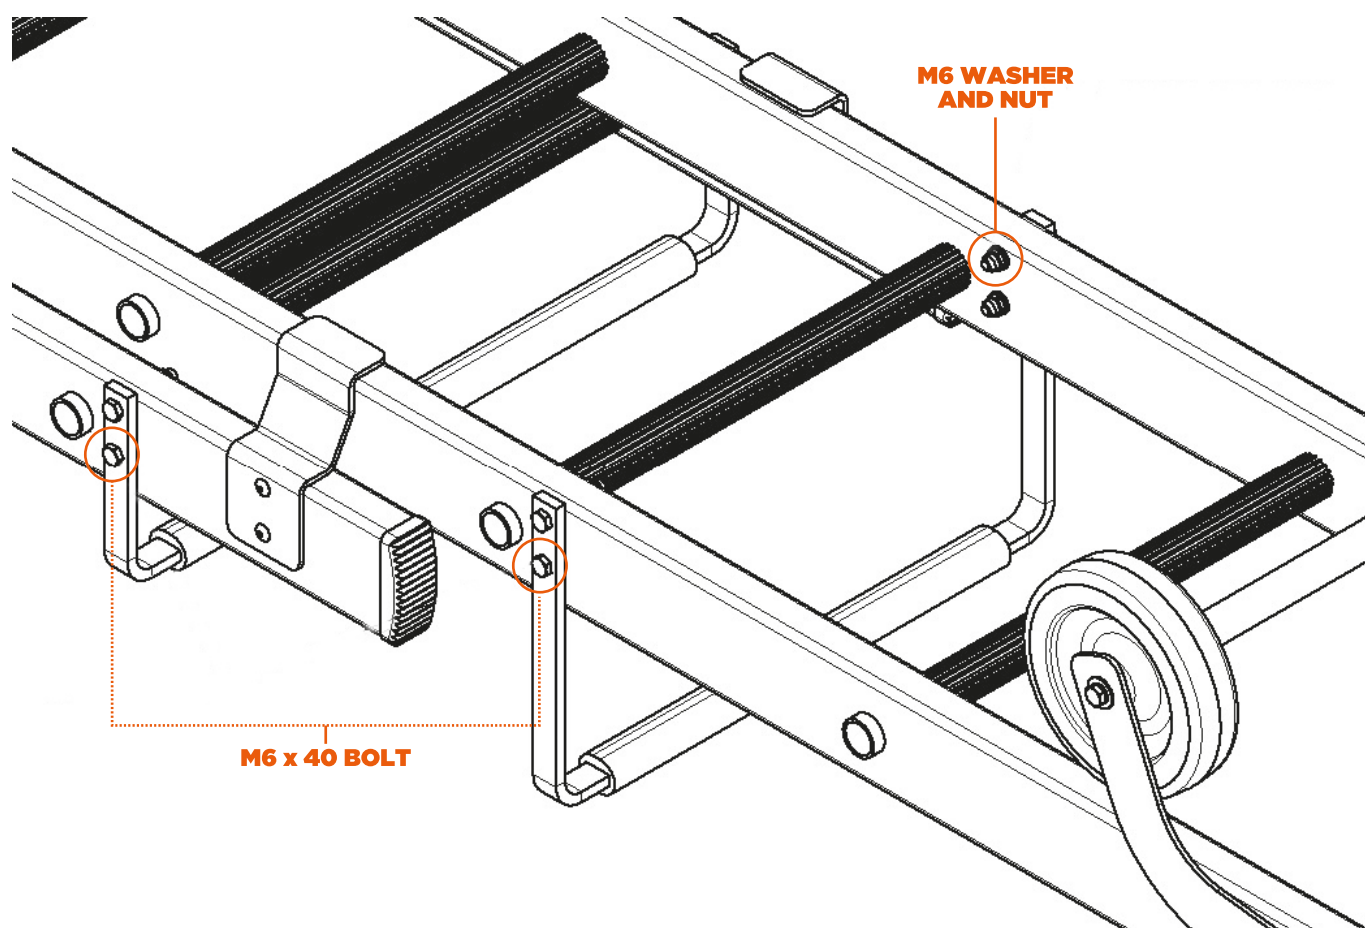



**LFI - Ladder & Fencing Industries
(Newent) Ltd.**

Horsefair Lane, Newent,
Gloucestershire GL18 1RP

Email: info@lfi-ladders.co.uk

 britishladders.co.uk     

